

# WATERCO

water, the liquid of life




## UNDER WATER LIGHT MK5 LED REPLACEMENT

### Installation Guide



Waterco's UWL Replacement Kit comes with an adapter plate that can easily replace other major brand of lights.


The major brand of Under Water lights that can be replaced with Waterco's are marked on the adapter plate.

- AQ = Aqua Quip
- SW = Swimworld
- ST = Stroud
- SE = Spa Electric
- PR = Poolrite



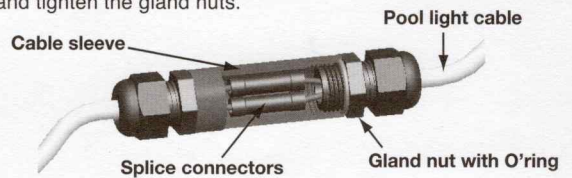
TWIST LOCK  
ADAPTOR FOR  
UNDER WATER LIGHT

1. Switch off the light and unplug the transformer.
2. Remove the screw securing the light to the mounting bracket. Uncoil the cable at the back of the light and remove the light from the pool.
3. Cut the cable of the existing light where it enters the back plate.  

4. Strip the outer insulation by 30mm on the cut cable and strip wires insulation by 6mm. It is important to check the copper wires of the old cable are bright and shiny. Otherwise cut the wires back as above and repeat until bright and shiny copper is shown.  


5. Unscrew the gland from the tube connector to expose existing crimped splice connectors and slide the gland over the cut and strip cable making sure the "o" ring is intact. Insert the exposed wires into the splice connector and crimp".  

6. Slide the tube over the crimped splice connectors approximately to the middle and screw in the glands and hand tighten with a bit more effort. Do not use tool. Submerge the connector and light under water to check for leaking. If necessary retighten gland nuts and ensure connector is water tight.

#### 7. Retrofit Connector (IP68).

Easy to use Retrofit Connector, simply crimp both connections with the splice connectors, slide the cable sleeve over the connection and hand tighten the gland nuts.



Note: If the power cable is 6mm diameter use the smaller joiner tube and gland nut assembly.

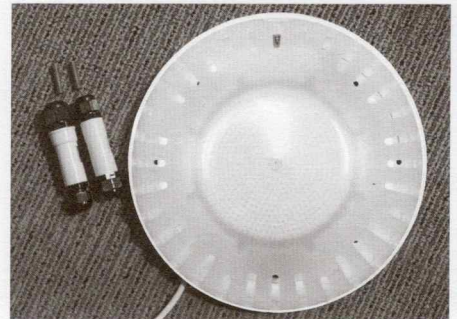


Note: If the power cable is larger than 6mm use the larger stepped joiner tube and gland nut assembly.



8. Attach under water light Twist Lock Adaptor Plate to existing pool mounting holes. Secure using screws into the appropriate mounting holes.
9. Wind power cable loosely around back of light. Ensure it is properly retained within securing clips.
10. Fit the light to the Twist Lock Adaptor Plate by aligning the lights locking lugs with the locking slots in the Twist Lock Adaptor Plate. Turn the light clockwise fully into the locked position. Fix light to Twist Lock Adaptor Plate with screw at the top to prevent unlocking.

Note: The Waterco LED Pool Light is supplied with two power cable connectors. The smaller joiner tube and gland nut suits 6mm diameter power cable & the larger stepped joiner & gland nut suits power cable larger than 6mm.



## WATERCO

Waterco Limited ABN 62 002 070 733

AUSTRALIA  
NSW - Sydney  
(HEAD OFFICE)  
Tel : +61 2 9898 8600

VIC/ TAS - Melbourne  
Tel : +61 3 9764 1211

WA - Perth  
Tel : +61 8 9273 1900

QLD - Brisbane  
Tel : +61 7 3299 9900

SA/ NT - Adelaide  
Tel : +61 8 8244 6000

ACT Distributor  
Tel : +61 2 6280 6476

INTERNATIONAL  
Waterco (Europe) Limited  
Sittingbourne, Kent, UK  
Tel : +44(0) 1795 521 733

Waterco France  
Saint Priest, France  
Tel : +33 4 72 79 33 30

Waterco (USA) Inc  
Augusta, Georgia, USA  
Tel : +1 706 793 7291

Waterco Canada  
Longueuil, Quebec, Canada  
Tel : +1 450 748 1421

Waterco (NZ) Limited  
Auckland, New Zealand  
Tel : +64 9 525 7570

Waterco © Limited  
Guangzhou, China  
Tel : +86 20 3222 2180

Waterco (Far East) Sdn. Bhd.  
Selangor, Malaysia  
Tel : +60 3 6145 6000

PT Waterco Indonesia  
Jakarta, Indonesia  
Tel : +62 21 4585 1481

Waterco Singapore Intl Pte Ltd  
Nehsons Building, Singapore  
Tel : +65 6344 2378

[www.waterco.com](http://www.waterco.com)